



[illegible]

The diagram illustrates a vertical double-slit interferometer. A light source (S) is positioned at a distance D from a double-slit aperture (A). The aperture has a width B . The light passes through the aperture into a vertical tube containing a medium with refractive index n . The distance from the aperture to the observation screen is c . The observation screen shows two interference fringes.

Zylindrische
Bohrung offen
Cylindrical bore
Open

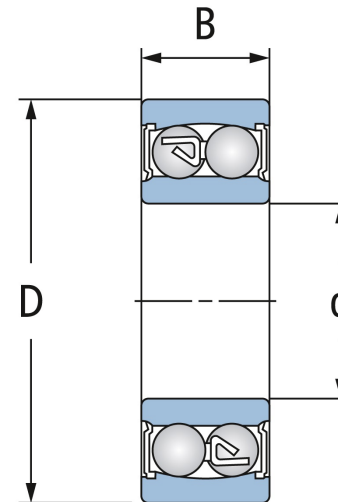

Zylindrische
Bohrung abgedichtet - 2RS
Cylindrical bore
2RS

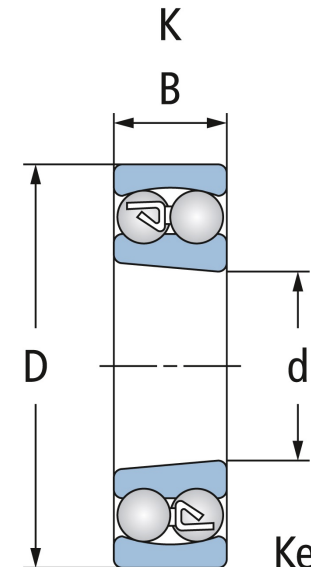

Kegel 1:12
Taper 1:12

Kegelige
Bohrung
Tapered bore